


The MPS 6000 series of sealers offer you the highest quality and utmost reliability of any machine on the market at the most effective price. Key design features include; a unique Teflon band tensioner, tool-less access to the seal section, removable sealing sections, the ability to easily add options to the machine in the field, customizable stands, and much more.

The MPS 6140 is a table top bag sealer capable of sealing bags up to 8 ounces in weight. This sealer is capable of sealing bags up to 150 micron in thickness at production rates (75 micron maximum when gusseted).

Designed for 24/7 operation, these sealers are suitable for all production environments.

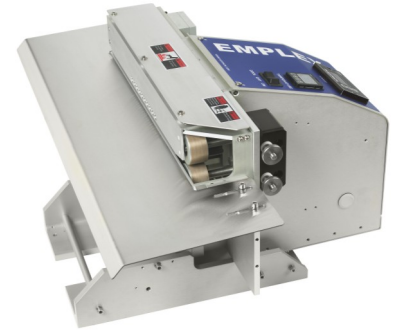

TECHNICAL SPECIFICATIONS

Electrical:	220 volts, 1 ph, 5 amps.	Temperature Range:	0-230 degrees Celsius.
Infeed Direction:	Right to Left.	Temperature Controller:	Digital PID autotune controller.
Motor:	Variable Speed DC drive	SPL	60 dB
Seal Throat Depth:	70 mm.	Mobility	Stationary
Sealing Section:	125 mm heating & cooling (each).	Class	1 (requires grounded wall outlet, 600v or less)
Variable Speed:	Up to 12.7 m per minute.	Duty	Continuous
Sealing Width:	6 mm standard.		
Sealer Operation:	Vertical or Horizontal		

*These machines are compliant to the following directives:
Machinery Safety Directive (MSD) - 2006/42/EC.
EMC Directive - 2004/108/EEC*

Telephone: 416-291-8085
Fax: 416-298-4328
Email: info@plexpack.com
www.plexpack.com

PLEXPACK



PLEXPACK Machinery Distributed By: